



Segment H2- I-10 (US 54/Patriot Fwy to Hawkins Blvd)

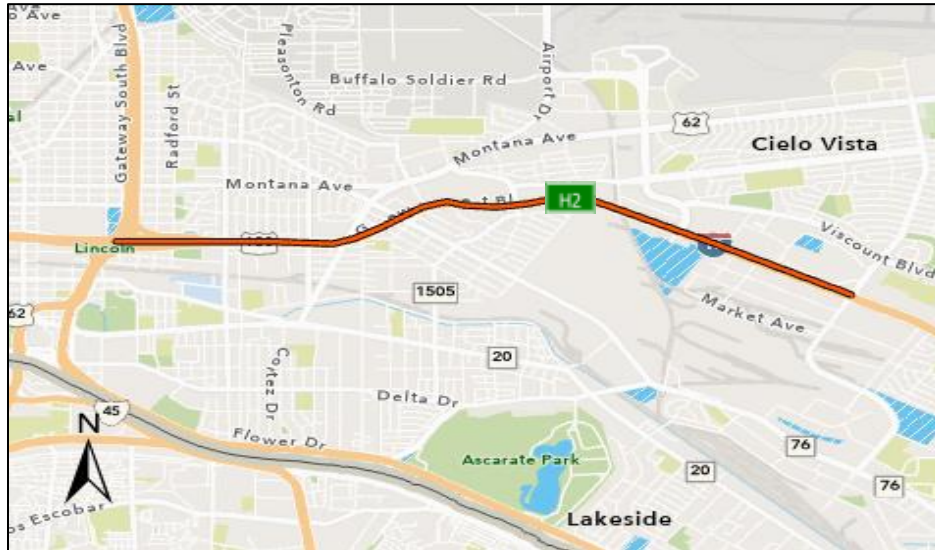

Segment Profile H2	
Length	4.1 miles
Functional Class	Interstate
Access Control	Limited
Lanes	3-5
Intelligent Transportation Systems	Designated Corridor? Yes ITS Deployment: Camera, Dynamic Message Sign (DMS)
Served by Transit?	Yes (Along Frontage Rd.); Route 7, Route 8, Route 21 (Partial)
Part of National Freight Network?	Yes
Intermodal Connector/Facility	No
Segment Summary Data	
Daily Volume: 2019/2045 (TDM)	164,107 194,454
Truck Volume: 2019/2045 (TDM)	12,257 20,044
Posted Speed	60 mph
Congested Speed	51.4 mph
Person Hours of Delay: 2018/2019	654,460 550,273
Travel Time Index: 2018/2019	1.21 1.19
Congested Cost	\$11,847,801

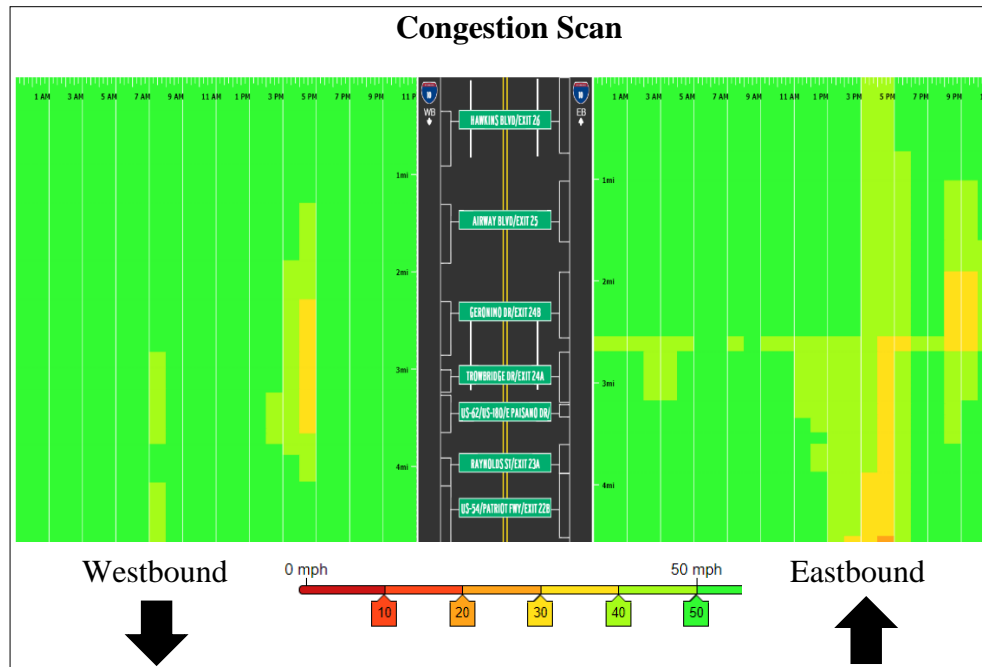

Other Corridor Characteristics

- This corridor serves as a major connector to the Americas International Bridge for the westbound traffic coming from East Central El Paso.
- Under [I-10 Connect Project](#), the corridor is currently under construction, with the primary goal to increase mobility and reduce congestion leading to Port of Entry through the construction and modification of direct connectors between I-10 and both US-54 and I-110.